


GOLDEN CALACUTTA

Rectified Glazed Floor Tile

KREM



ACTUAL SIZE DETAIL

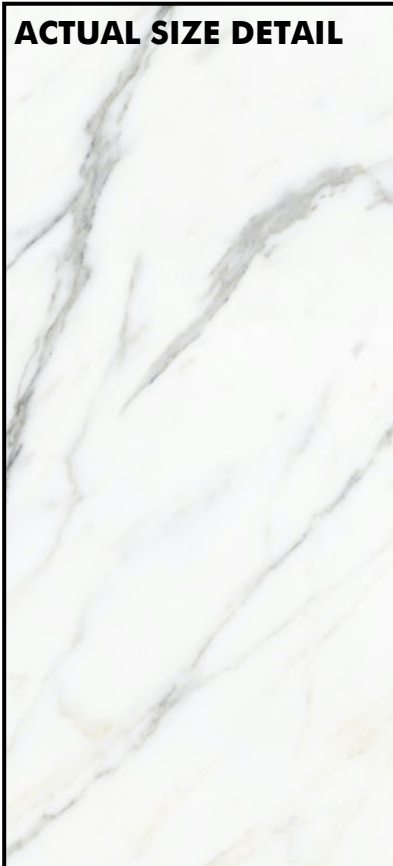

Golden Calacutta

>6

Mohs

V3

Shades



ColdRes

RET

Rectified

SIZE & PACKING INFO

| | Pcs./Ctn. | m ² /Ctn. | Ctn./Pallet | kg/Ctn. |
|------------|-----------|----------------------|-------------|---------|
| 30 x 60cm | 8 | 1,44 | 40 | 30 |
| 60 x 60cm | 4 | 1,44 | 40 | 30 |
| 60 x 120cm | 2 | 1,44 | 40 | 30 |

Coefficient of Friction test results exceed A.D.A recommendations ASTM C-1028 >0.60 wet DCOF >0.42

PRODUCT DESCRIPTION


Rectified Glazed Floor Tile 60 x 60

Only available in Polished finish.

6 different 60x120cm faces, 12 different 60x60cm faces.

GOLDEN CALACUTTA


6 different 60x120 faces

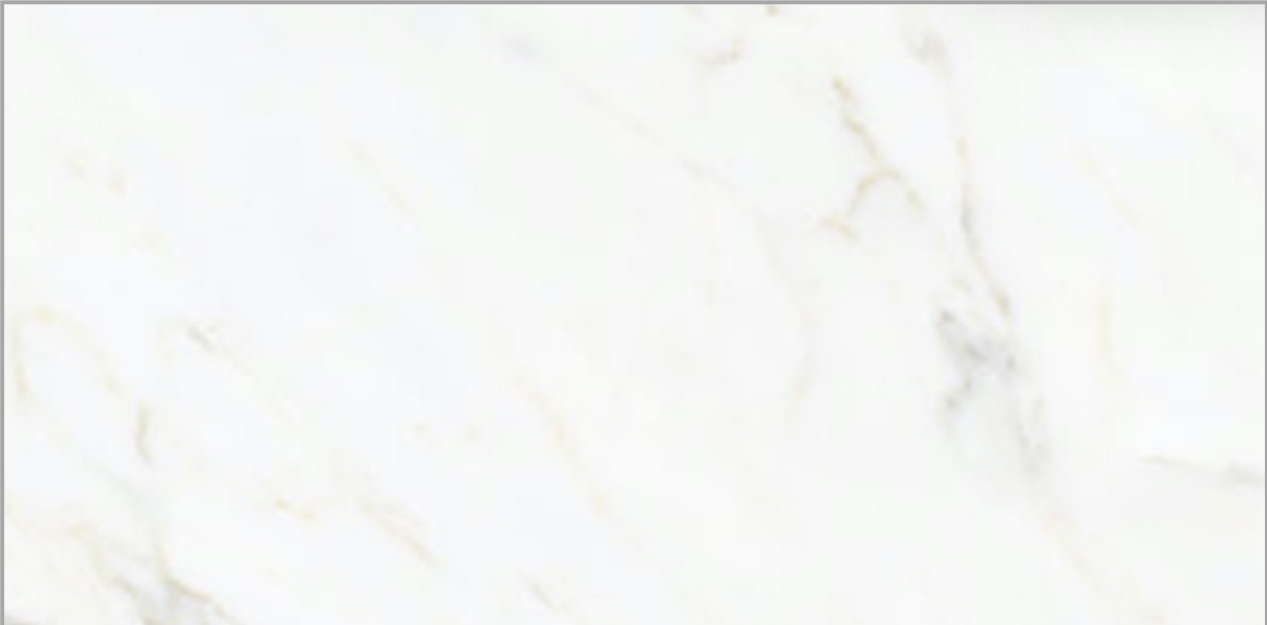

GOLDEN CALACUTTA

6 different 60x120 faces

KREM

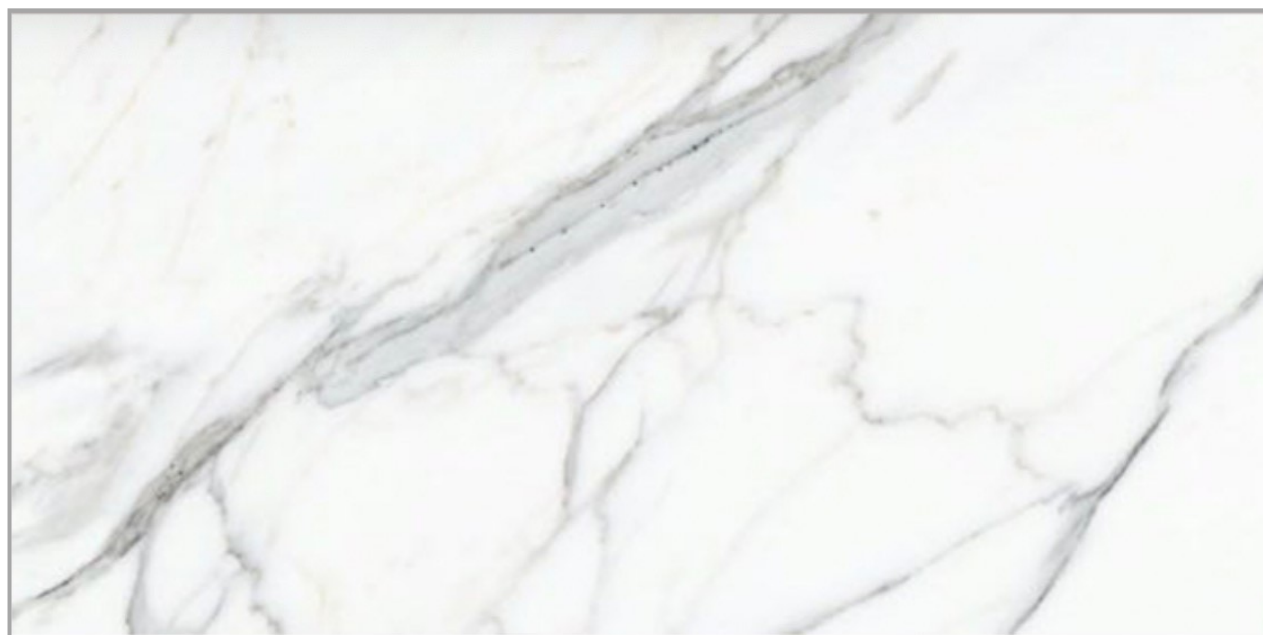

GOLDEN CALACUTTA

PRODUCT SPECIFICATION



GLAZED FLOOR TILE

Pressed Ceramic Tiles International Norms

ISO 13006–10545/98

GROUP: B1

| No. | Icon | Test item | Unit | Requirements of Standard | | Specifica- tion | Require- ment |
|-----|------|-------------------------------|------|--|-------|--------------------|------------------|
| 1 | | Dimensional variation | (%) | length of side | ±0.6 | < 0.6 | Qualified |
| 2 | | Side straightness | (%) | ± 0.5 | | < 0.5 | Qualified |
| 3 | | Squareness | (%) | ± 0.6 | | < 0.6 | Qualified |
| 4 | | Surface flatness | (%) | Center curvature degree | ± 0.5 | < 0.5 | Qualified |
| | | | | Warping degree | ± 0.5 | < 0.5 | Qualified |
| | | | | Side curvature degree | ± 0.5 | < 0.5 | Qualified |
| 5 | | Surface quality | — | Sighting vertically at a distance of 0.8 meter away from the tile no defect on surface is observed in at least 95% of the tile | | conformed | Qualified |
| 6 | | Breaking strength | N | When thickness ≥ 7.5mm the Average value ≥ 1100 | | > 1100 | Qualified |
| 7 | | Rupture modulus | Mpa | Average value ≥ 30 individual ≥ 27 | | > 30 > 30 | Qualified |
| 8 | | Abrasion resistance | Revs | 1500 | | > 1500 | Qualified |
| 9 | | Hardness | MOHS | Mohs Scale | | > 6 | Qualified |
| 10 | | Frost resistance | — | No cracking after test | | conformed | Qualified |
| 11 | | Resistance to acids & alkalis | — | not less than grade GB | | Grade GA | Qualified |
| 12 | | Chemical resistance | — | not less than grade GB | | Grade GA | Qualified |