


CITY

Rectified Glazed Porcelain

KREM

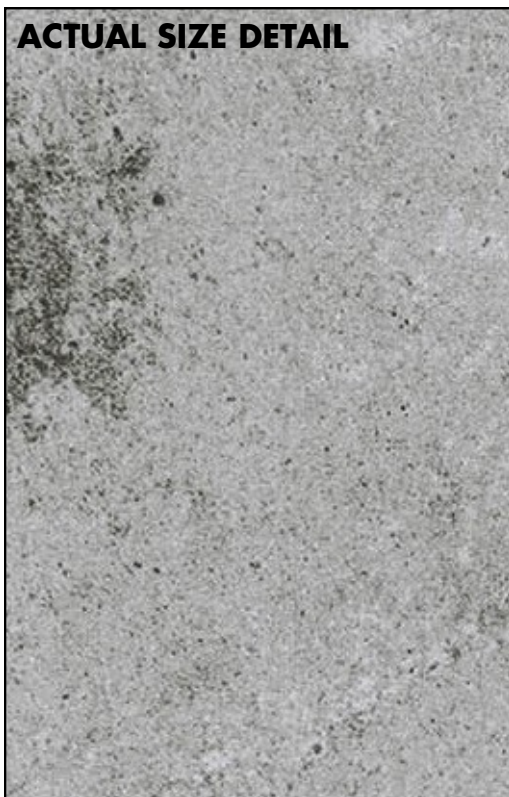

Bianco



Ivory



Gris

4 PE **>6** Mohs **V3** Shades  ColdRes **RET** Rectified

| SIZE & PACKING INFO | Pcs./Ctn. | m ² /Ctn. | Ctn./Pallet | kg/Ctn. |
|--------------------------------|-----------|----------------------|-------------|---------|
| 30 x 60cm | 8 | 1,44 | 40 | 28 |
| 60 x 60cm | 4 | 1,44 | 40 | 29 |
| 60 x 120cm | 2 | 1,44 | 40 | 35 |

Coefficient of Friction test results exceed A.D.A recommendations ASTM C-1028 >0.60 wet DCOF >0.42

PRODUCT DESCRIPTION Rectified 30 x 60 & 60 x 60 & 60 x 120 cm Porcelain Floor Tile
Available in Matt, Lapatto, Polished & R11 anti-slip finishes.
5 different 60x120cm faces

CITY
Bianco
5 faces

KREM



CITY
Ivory & Gris
5 faces

KREM



CITY PRODUCT SPECIFICATION

GLAZED PORCELAIN FLOOR TILE

Pressed Ceramic Tiles International Norm

ISO 13006-10545/98

GROUP: B1a



| No. | Icon | Test item | Unit | Requirements of Standard | Specification | Requirement | |
|-----|------|-------------------------------|------|--|---------------|----------------|-----------|
| 1 | | Dimensional variation | (%) | length of side | ±0.6 | < 0.6 | Qualified |
| 2 | | Side straightness | (%) | ± 0.5 | | < 0.5 | Qualified |
| 3 | | Squareness | (%) | ± 0.5 | | < 0.5 | Qualified |
| 4 | | Surface flatness | (%) | Center curvature degree | ± 0.5 | < 0.5 | Qualified |
| | | | | Warping degree | ± 0.5 | < 0.5 | Qualified |
| | | | | Side curvature degree | ± 0.5 | < 0.5 | Qualified |
| 5 | | Surface quality | — | Sighting vertically at a distance of 0.8 meter away from the tile no defect on surface is observed in at least 95% of the tile | | conformed | Qualified |
| 6 | | Water absorption | (%) | Average value ≤ 0.5 individual ≤ 0.6 | | < 0.5 < 0.6 | Qualified |
| 7 | | Breaking strength | N | When thickness ≥ 7.5mm the Average value ≥ 1300 | | > 1300 | Qualified |
| 8 | | Rupture modulus | Mpa | Average value ≥ 35 individual ≥ 32 | | > 35 > 32 | Qualified |
| 9 | | Abrasion resistance | Revs | 1500 | | > 1700 | Qualified |
| 10 | | PEI rating | — | Porcelain Enamel Institute hardness rating | | 4 | — |
| 11 | | Hardness | MOHS | Mohs Scale | | > 6 | Qualified |
| 12 | | Frost resistance | — | No cracking after test | | conformed | Qualified |
| 13 | | Resistance to acids & alkalis | — | not less than grade GB | | Grade GA | Qualified |
| 14 | | Chemical resistance | — | not less than grade GB | | Grade GA | Qualified |
| 15 | | Slip resistance | R | Ramp slip rating test | | R11 | Exterior |
| | | | DCoF | DCoF: 0.42 | | >0.42 | Matt/ |