

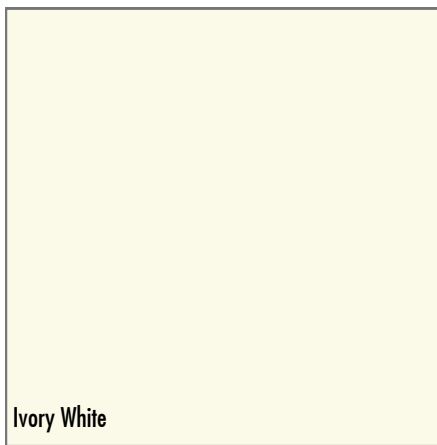


BLACK & WHITE

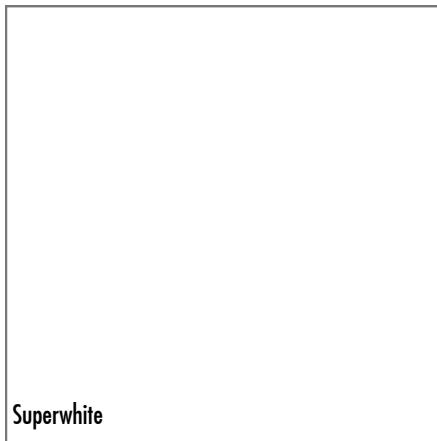

Rectified Full Body Unglazed Polished Porcelain Floor Tile

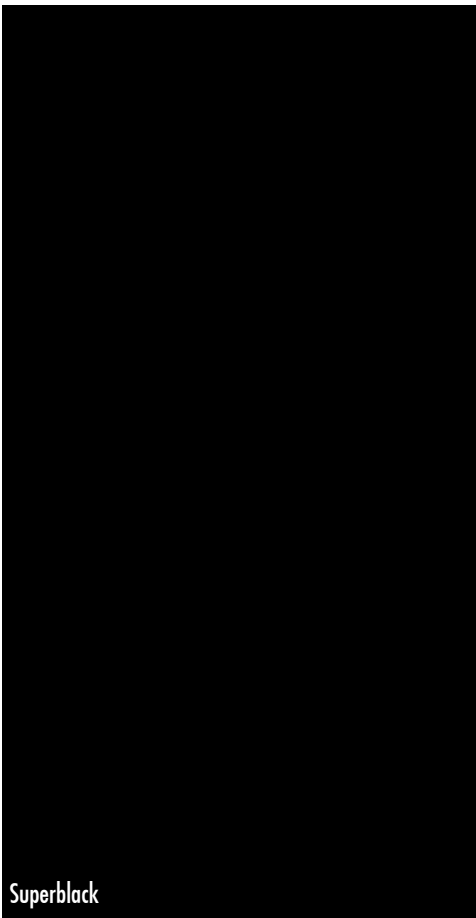

V1

Shades



ColdRes

RET

Rectified

SIZE & PACKING INFO

	Pcs./Ctn.	m ² /Ctn.	Ctn./Pallet	kg/Ctn.
30 x 60cm	8	1,44	40	28
60 x 60cm	4	1,44	40	29
60 x 120cm	2	1,44	40	35


Coefficient of Friction test results exceed A.D.A recommendations ASTM C-1028 >0.60 wet DCOF >0.42

PRODUCT DESCRIPTION


Rectified 30 x 60 & 60 x 60 & 60 x 120 cm Unglazed Polished Floor Tile
Available in Polished finish and also available in 80 x 80cm

BLACK & WHITE
SUPERBLACK


KREM



BLACK & WHITE
SUPERWHITE & IVORY WHITE



Superwhite



Ivory White

BLACK & WHITE PRODUCT SPECIFICATION

FULL BODY POLISHED PORCELAIN FLOOR TILE

Pressed Ceramic Tiles International Norms

ISO 13006-10545/98

GROUP: B1a

KREM

No.	Icon	Test item	Unit	Requirements of Standard	Specification	Requirement	
1		Dimensional variation	(%)	length of side	± 0.6	< 0.6	Qualified
2		Side straightness	(%)		± 0.5	< 0.5	Qualified
3		Squareness	(%)		± 0.5	< 0.5	Qualified
4		Surface flatness	(%)	Center curvature degree	± 0.5	< 0.5	Qualified
				Warping degree	± 0.5	< 0.5	Qualified
				Side curvature degree	± 0.5	< 0.5	Qualified
5		Surface quality	—	Sighting vertically at a distance of 0.8 meter away from the tile no defect on surface is observed in at least 95% of the tile	conformed	Qualified	
6		Water absorption	(%)	Average value ≤ 0.5 individual ≤ 0.6	< 0.5 < 0.6	Qualified	
7		Breaking strength	N	When thickness $\geq 7.5\text{mm}$ the Average value ≥ 1300	> 1300	Qualified	
8		Rupture modulus	Mpa	Average value ≥ 35 individual ≥ 32	> 35 > 32	Qualified	
9		Abrasion resistance	mm ³	≤ 175	< 175	Qualified	
10		Frost resistance	—	No cracking after test	conformed	Qualified	
11		Resistance to acids & alkalis	—	not less than grade UB	Grade UA	Qualified	
12		Chemical resistance	—	not less than grade UB	Grade UA	Qualified	